




To turn the scale on in Bluetooth mode:

- Hold the  button for one second.
- Or plug the scale into USB power. The scale turns on automatically with USB power.
- “HELLO” is displayed. The scale resets to zero.
- The bottom left blue LED blinks to indicate that the scale is ready for a BLE connection.

To turn the scale on in no-Bluetooth mode:

- Hold the  button for one second.
- “HELLO” is displayed. The scale resets to zero.
- The bottom left blue LED does not blink.

To turn the scale off:

- Hold the  button for 2 seconds until the “SLEEP” message is displayed. Lift your finger.
- If not connected to an app, the scale will turn itself off after 10 minutes of inactivity.
- The scale will never turn off if USB power is plugged in or if the scale is connected to BLE.


When touching the  or  button:

- The top right LED lights up to show that your finger touch was sensed.




To weigh something:

- Place an object on the scale and read the top number.



To reset the weight to zero:

- Tap the  button once. Wait 2 seconds.

To use the timer:

- Tap the  button once to start the timer. The timer display turns on and starts counting seconds.
- Tap the  button once to stop the timer. The stopped time remains displayed.
- Tap the  button once more to reset the timer to 0.0 and start counting seconds again.
- The right middle red LED turns on when the timer is on. The red LED turns off when the timer is off.
- To save battery power, the timer display is off when the scale is first turned on.
- The timer display stays on once the timer has been used until the scale itself is turned off.


Grams vs ounces:

- To switch measurement units between grams and ounces: with the scale off, touch and hold both the  and  buttons at the same time.
- A message of “02” or “9” is displayed. “9” means your scale is in grams mode. “02” means your scale is in ounces mode.

Connecting to an app:

- After you power on, the scale will announce itself for pairing. You will see a blinking blue LED on the left bottom side.
- This blue LED stays on until there is a BLE connection.
- This blue LED turns off when pairing succeeds.
- The scale never gives up trying to BLE pair.
- This scale is very programmer friendly. Visit <http://decentespresso.com/scale> for more info.

# decent SCALE

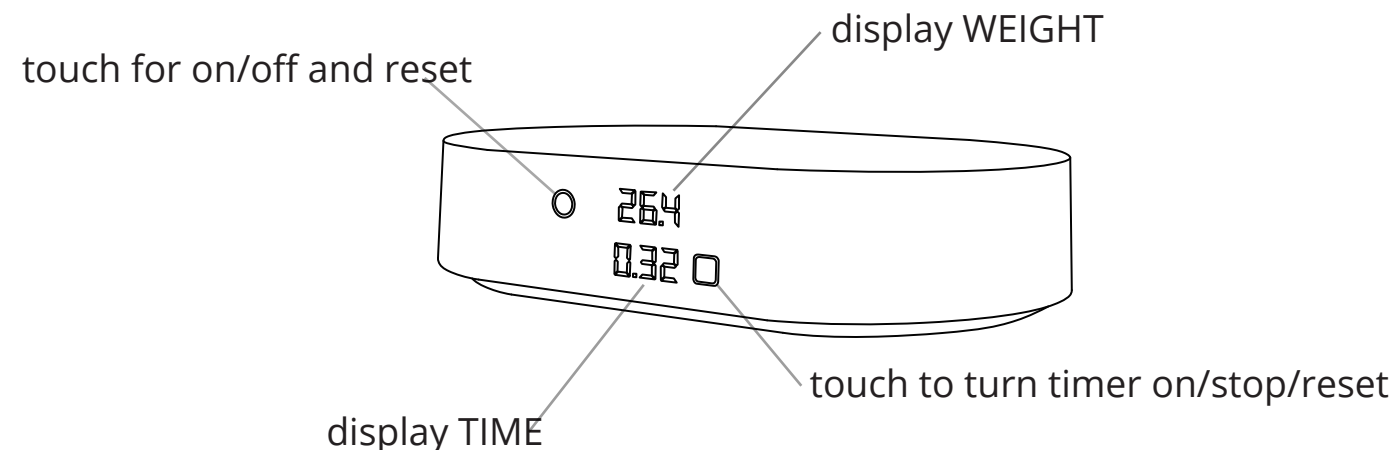









What’s in the box:

- One Decent Scale
- One micro USB power cable
- This piece of paper

Specifications:

- Power: 5V micro USB or 4x AA batteries
- Maximum load: 2000g
- Weighing accuracy: 0.1g (<200g)  
0.5g (<1000g), 1g (<2000g)
- BLE compatibility: Apple devices with iOS 7 or newer, Android OS 4.4.3 or newer

To calibrate:

- With the scale off, hold the  button until HELLO is displayed.
- Lift your finger and tap the  button 4 times while HELLO is displayed.
- On the 4th time, keep holding the  button until the word CAL appears.
- Tap the  button once.
- Place a 1000g weight on the scale. Tap the  button.
- Place a 2000g weight on the scale. Tap the  button.
- The word PASS will appear.
- Hold the  button down for 1 second. The word CAL will appear. Hold the  button down for 1 second to turn the scale off.
- Your scale is now calibrated.

Usage tips:

- Place the scale on a flat, level and stable surface.
- Don't put objects weighing over 2kg on the scale.
- Don't leave heavy objects on the scale for a long time or the weighing accuracy will be affected.
- Weight readings may be “jittery” and the tare function might not work well if there is vibration or wind.
- You should remove the batteries if you are not going to use the scale for more than one month.
- Do not try to pull the cover off the scale.
- Prolonged heat or humidity may deform the plastic or cause the scale to stop working.

Warranty:

This product is covered by a two year warranty, which does not include the following:

- Fall, shock, over weight or other improper use.
- Damage due to fire, earthquakes, floods, storms, lightning and other natural disasters.
- Usage contrary to the indications of this manual.
- Stains, scratches, or discoloration may happen with use. This is normal.
- This product is made for home use only. Not approved for commercial use.

More information:

<https://decentespresso.com/decentyscale>

Version 1.2, May 2024.  
Copyright 2018 Decent Espresso International Limited.

#### Federal Communications Commission (FCC) Statement

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user’s authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.